




Import Profile into EDM-VCS

In many cases, the breakpoints for a desired test profile will be contained in spreadsheet. This can be easily imported into EDM-VCS. Follow these steps to do this.


- 
- 
- Go to **Setup** → **Test Configuration** → Test Profile
- Select **Import/Analyze** then **Import from CSV**

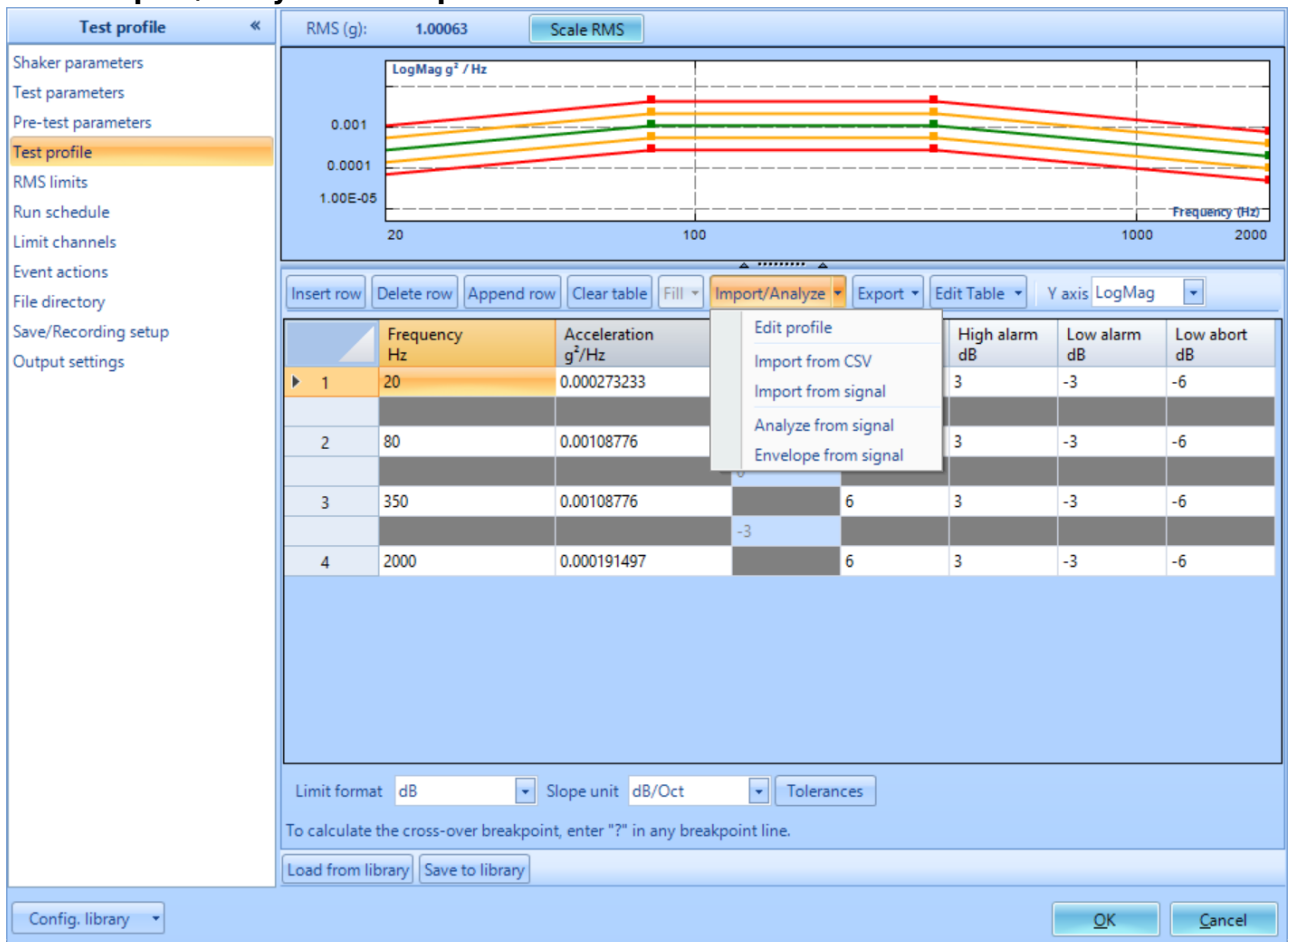

The screenshot shows the 'Test profile' configuration window in EDM-VCS. At the top, the RMS value is 1.00063 g. Below this is a graph of LogMag g²/Hz vs Frequency (Hz) on a log-log scale. The graph shows a multi-line profile with several segments. Below the graph is a table with columns for Frequency (Hz), Acceleration (g²/Hz), and alarm levels (High alarm dB, Low alarm dB, Low abort dB). A context menu is open over the table, showing options like 'Import from CSV' and 'Analyze from signal'. At the bottom, there are buttons for 'Load from library' and 'Save to library', and 'OK' and 'Cancel' buttons.

	Frequency Hz	Acceleration g ² /Hz		High alarm dB	Low alarm dB	Low abort dB
1	20	0.000273233		3	-3	-6
2	80	0.00108776		3	-3	-6
3	350	0.00108776	6	3	-3	-6
			-3			
4	2000	0.000191497	6	3	-3	-6

3. Find and select the .csv file containing the profile
4. Make sure that the formatting is correct. Press **OK**

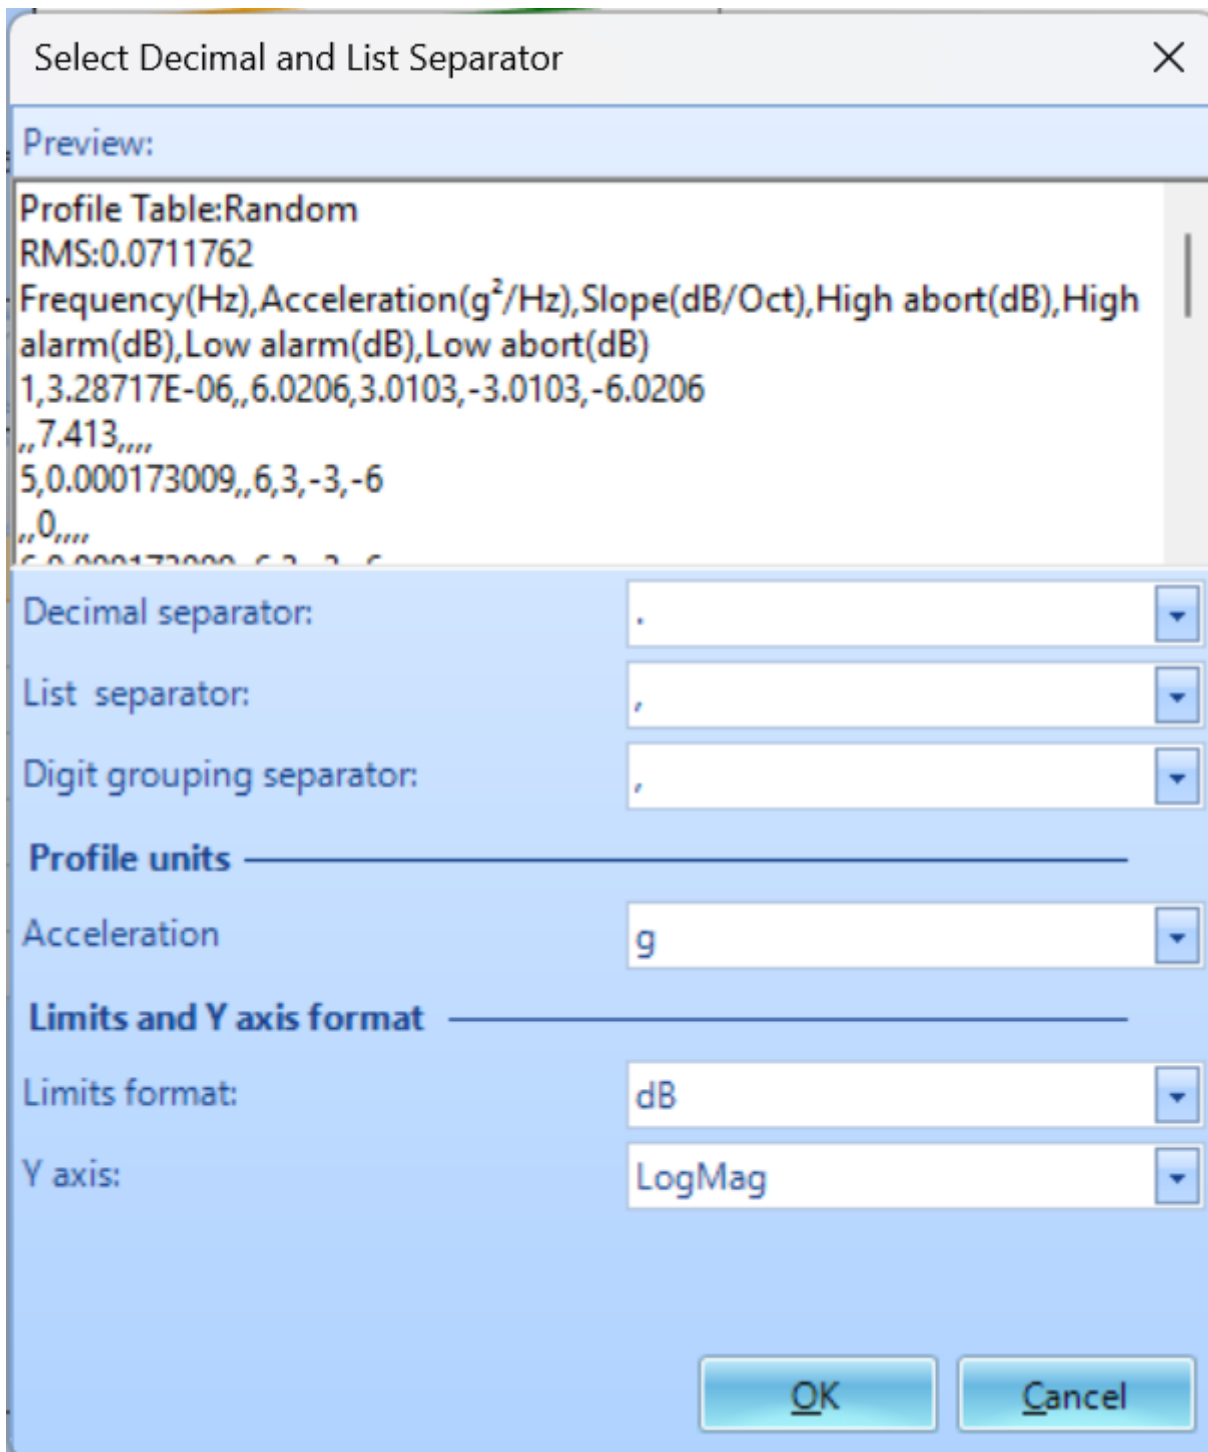

5. The profile will now be imported into the software

From: <https://help.go-ci.com/> - **Crystal Instruments Help**

Permanent link: <https://help.go-ci.com/vcs:importprofile?rev=1716340115>

Last update: **2024/05/22 01:08**