


Import Profile into EDM-VCS

In many cases, the breakpoints for a desired test profile will be contained in spreadsheet. This can be easily imported into EDM-VCS. Follow these steps to do this.

- 
- 

- Go to **Setup** → **Test Configuration** → Test Profile
- Select **Import/Analyze** then **Import from CSV**

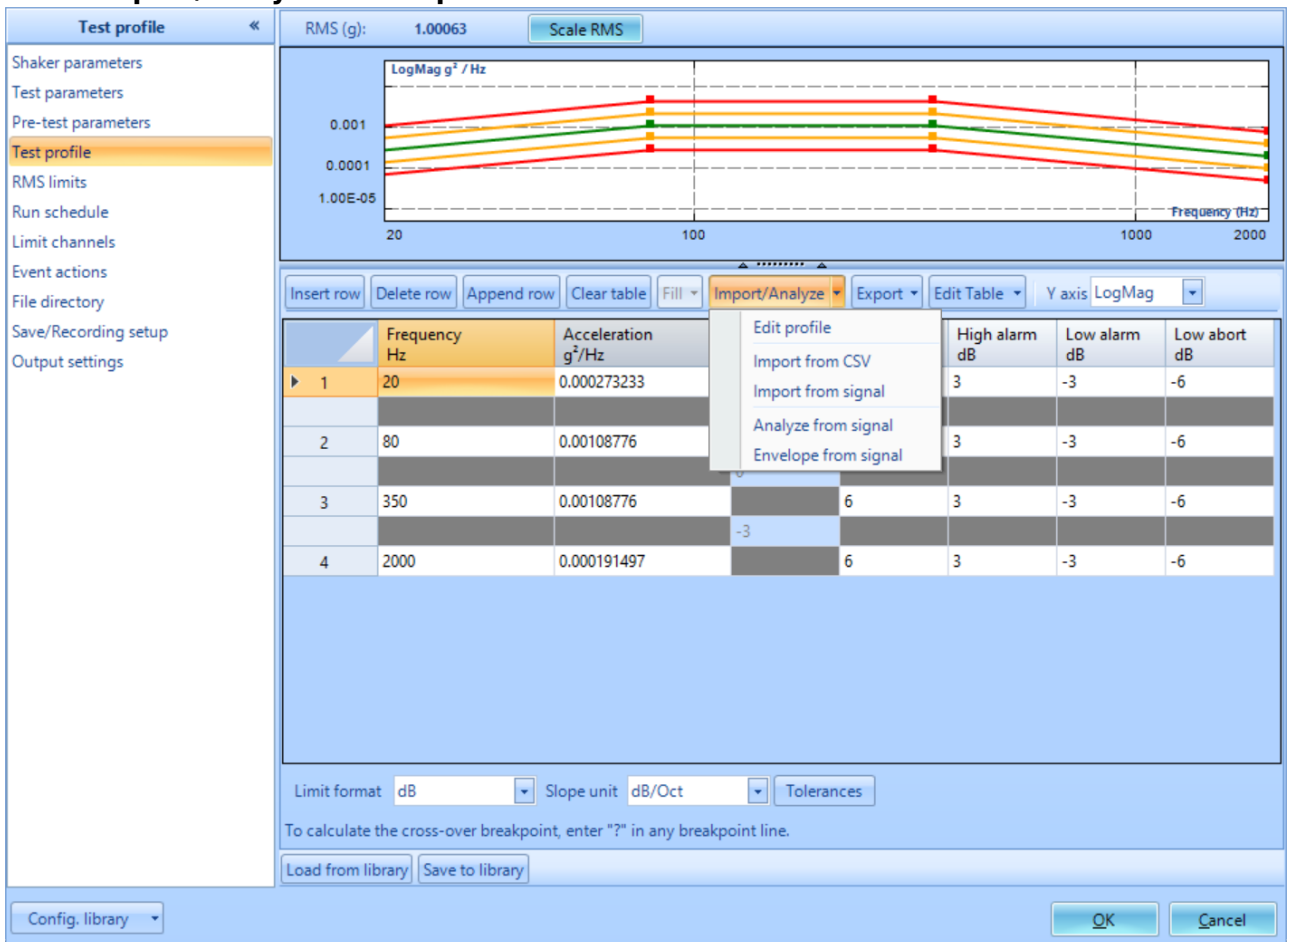


The screenshot shows the 'Test profile' configuration window. At the top, it displays 'RMS (g): 1.00063' and a 'Scale RMS' button. Below this is a graph showing 'LogMag g² / Hz' on the y-axis (log scale from 1.00E-05 to 0.001) and 'Frequency (Hz)' on the x-axis (log scale from 20 to 2000). The graph contains several colored lines representing different test profiles. Below the graph is a table with the following data:

	Frequency Hz	Acceleration g²/Hz		High alarm dB	Low alarm dB	Low abort dB
▶ 1	20	0.000273233		3	-3	-6
2	80	0.00108776		3	-3	-6
3	350	0.00108776	6	3	-3	-6
			-3			
4	2000	0.000191497	6	3	-3	-6

At the bottom of the window, there are fields for 'Limit format' (dB), 'Slope unit' (dB/Oct), and 'Tolerances'. A note states: 'To calculate the cross-over breakpoint, enter "?" in any breakpoint line.' There are also buttons for 'Load from library', 'Save to library', 'OK', and 'Cancel'.

3. Find and select the .csv file containing the profile
4. Make sure that the formatting is correct. Press **OK**

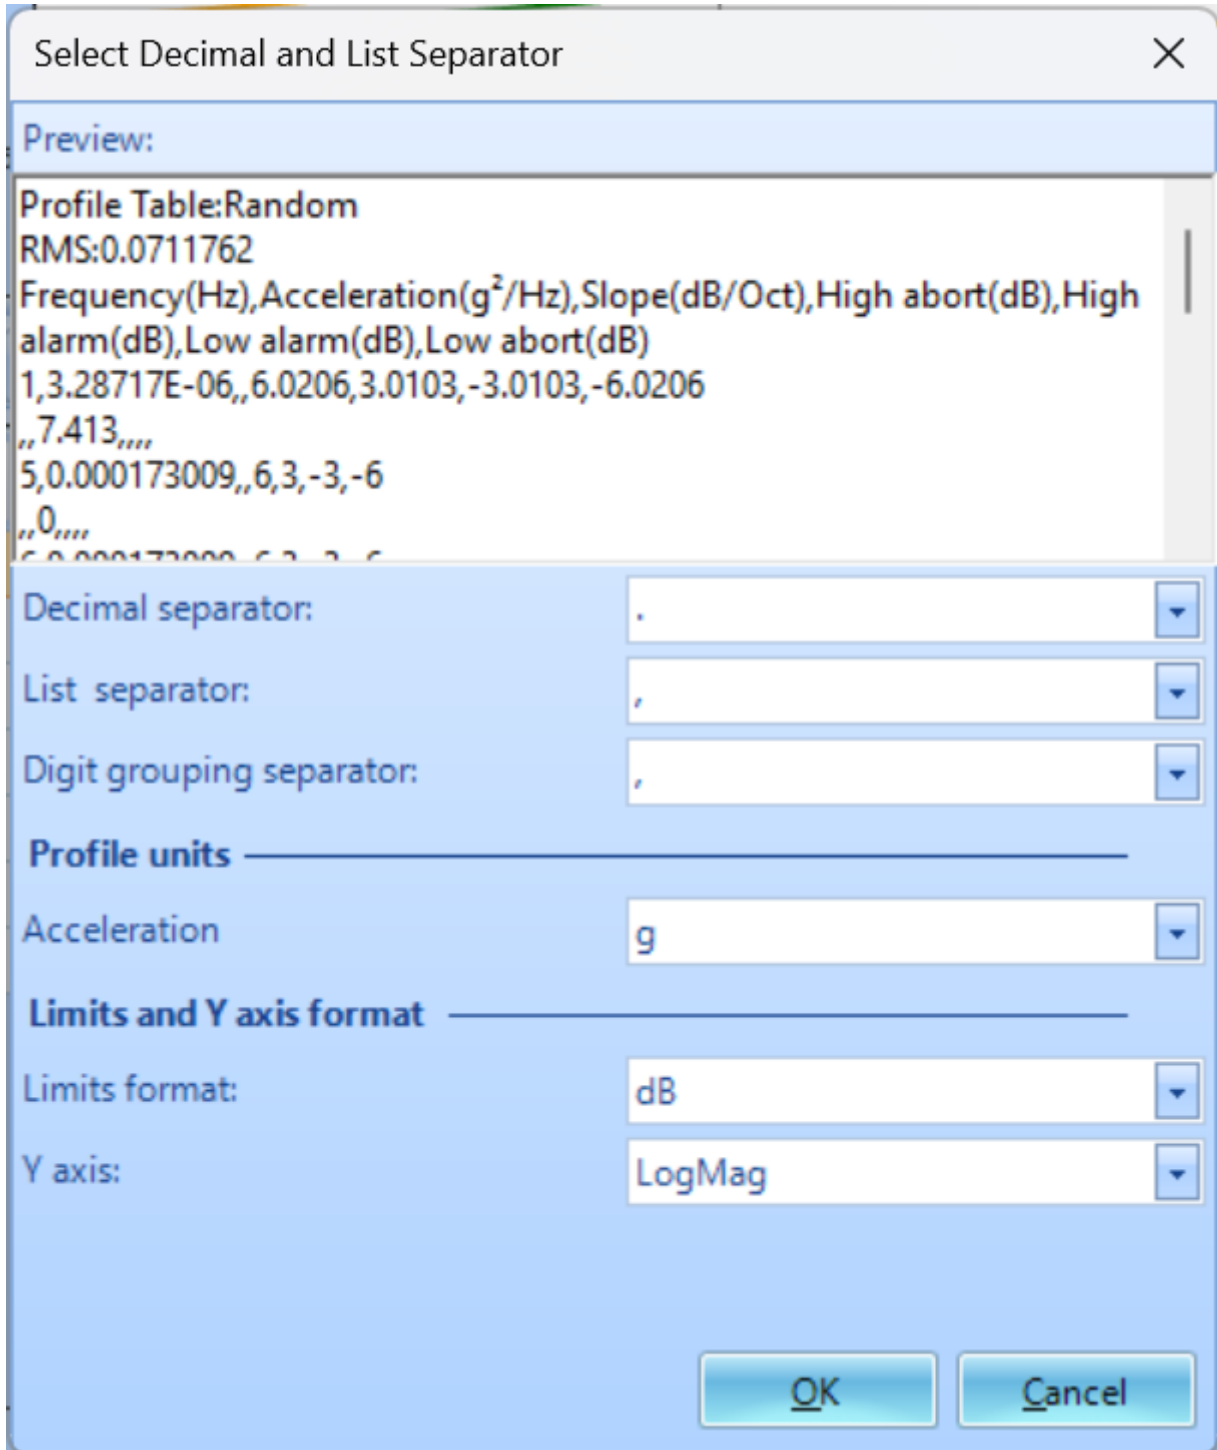

5. The profile will now be imported into the software

From: <https://help.go-ci.com/> - **Crystal Instruments Help**

Permanent link: <https://help.go-ci.com/vcs:importprofile?rev=1716340115>

Last update: **2024/05/22 01:08**