
Setting up alert Emails from VCS

For Outlook


Setup
To start, we need to change the mail settings.

Mail Setting defines how EDM sends email per Event Action Rules. SMTP server address, port number, encryption type, and authentication parameters are specified as required. The Spider hardware (only version 7.x) is also equipped with a send email function that can be used when the email server doesn't require SSL encryption. Sending email through the hardware is not always available when SSL encryption is required. This feature enables sending emails in Black Box mode. The origin of email, either from the Spider hardware or the EDM, can be chosen from the Event Action Rules.Some email accounts have different SMTP server addresses that EDM must use in order to send emails. These SMTP Servers can be found in the primary email account settings, such as for Outlook in the POP and IMAP setting or searching for the keyword "SMTP"

We can use the shortcut Ctrl-G or under Tools, click Global Settings.

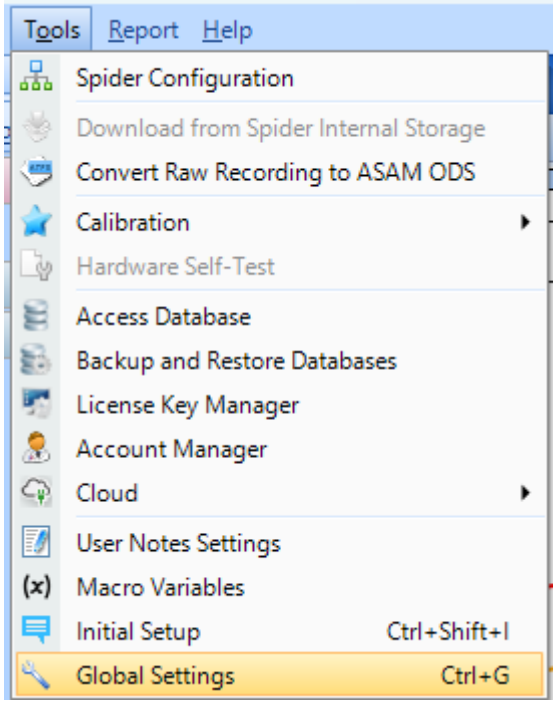


Once the window is up, on the left side, click Mail settings.

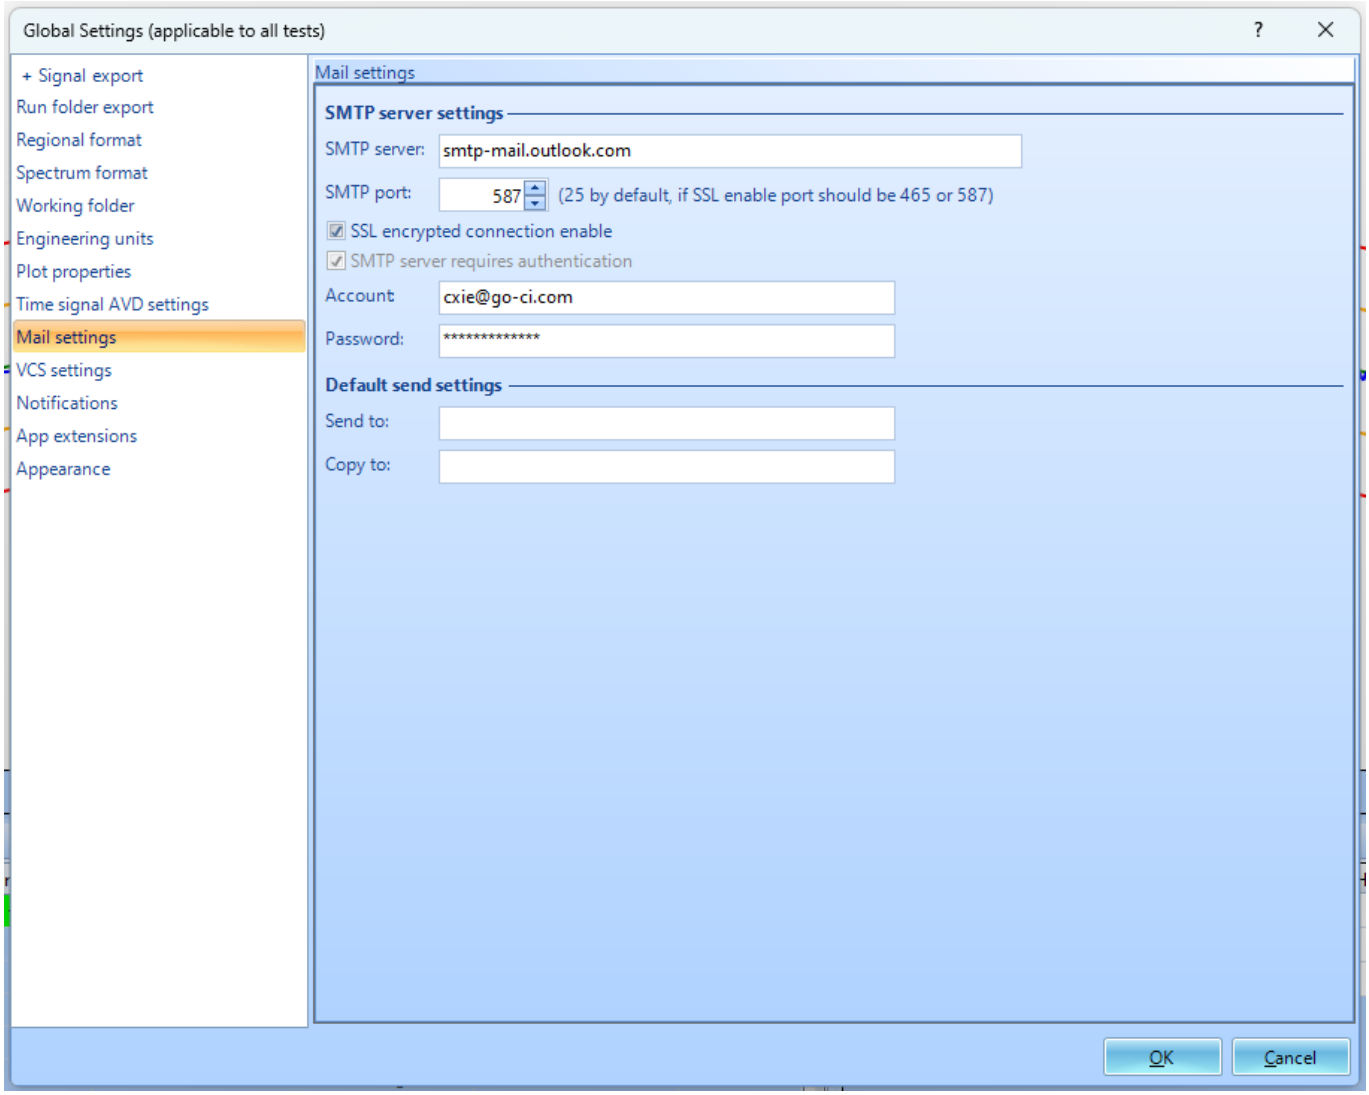


For Outlook, the SMTP server should be: **smtp-mail.outlook.com**
Change the SMTP port to the number that fits your needs.

Enter the outlook account and the password that you want the mail sent to.


Creating the Event actions

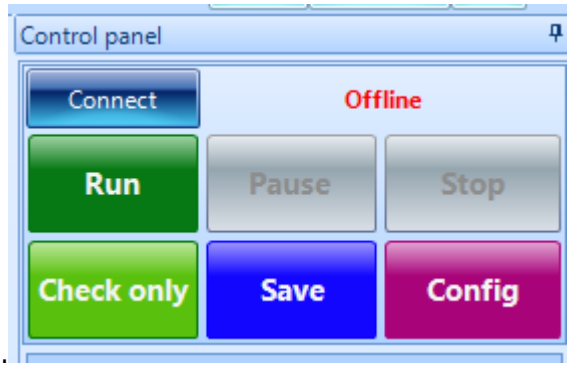


In the control panel on the left, click **Config**.
Click **Event actions** on the left menu.

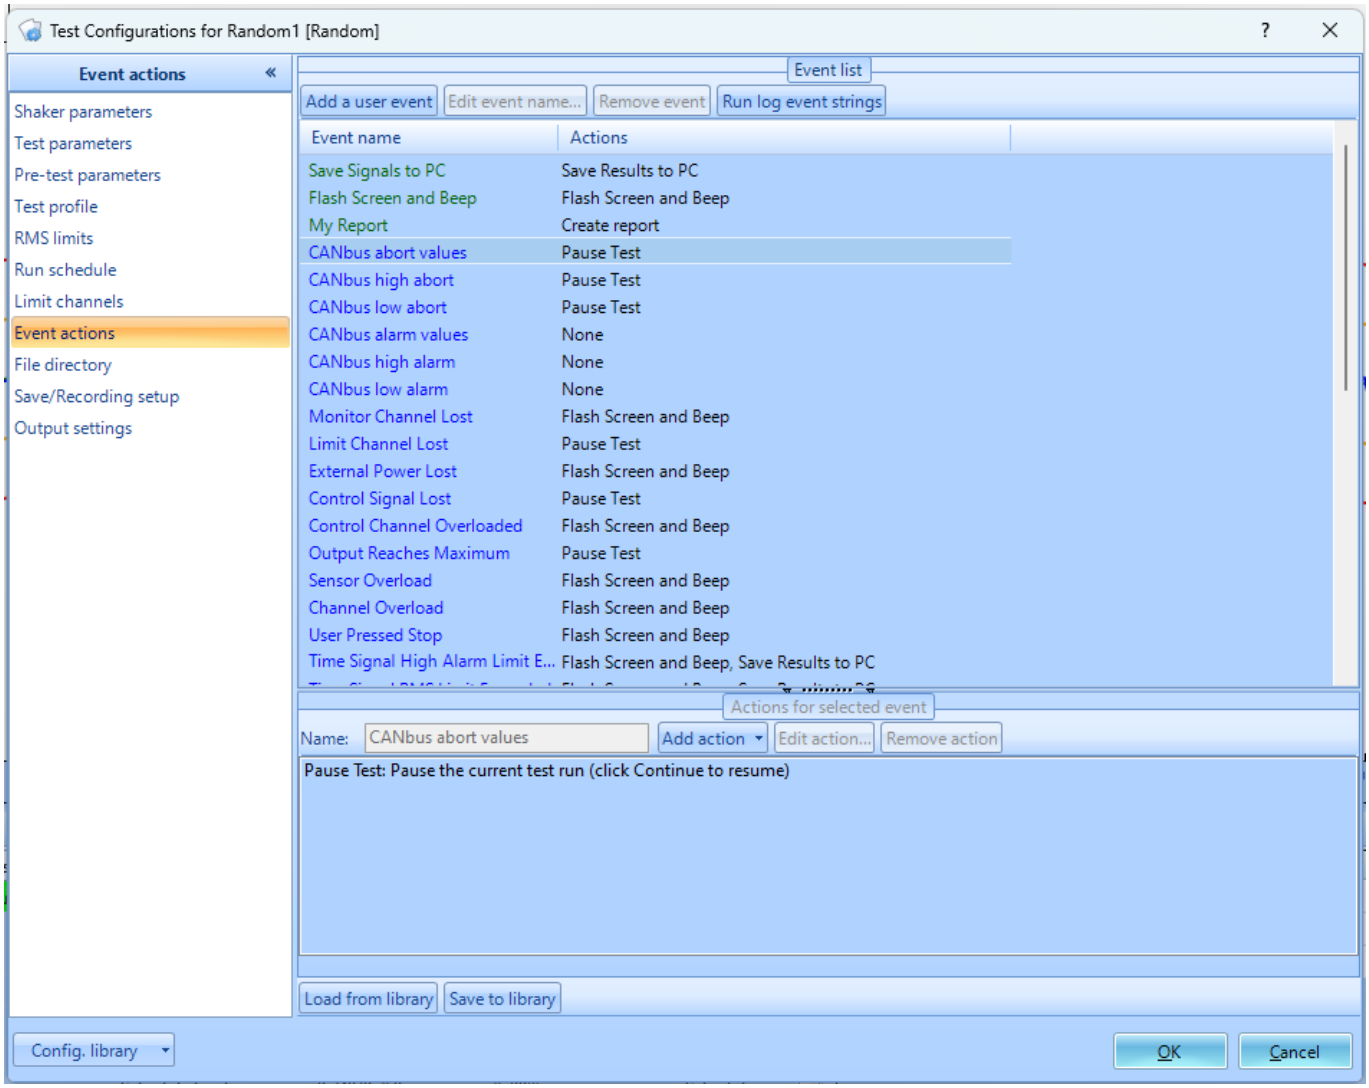


Click Add a user event under the event list. Change the Event name to your liking.

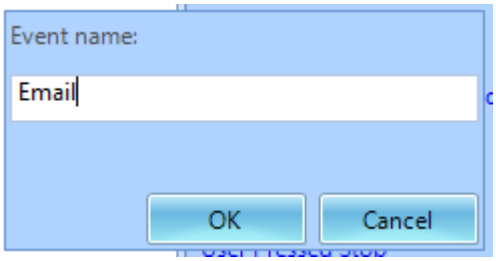


Click **Add action**.

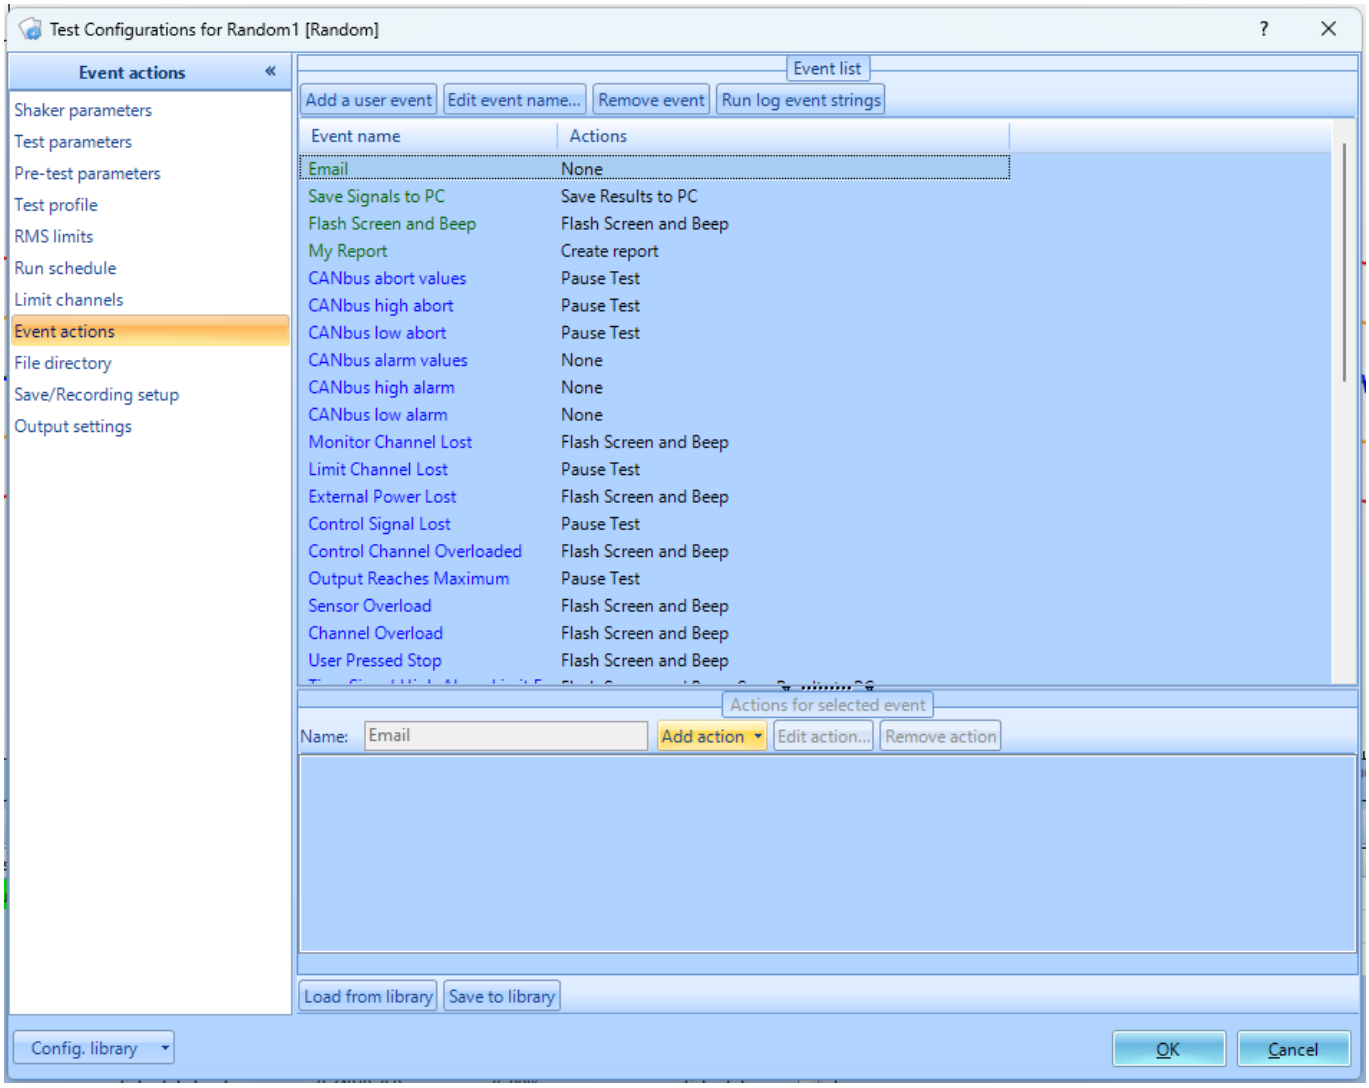
Test Configurations for Random1 [Random]
Event actions
Shaker parameters
Test parameters
Pre-test parameters
Test profile
RMS limits
Run schedule
Limit channels
Event actions
File directory
Save/Recording setup
Output settings
Event list
Add a user event
Edit event name...
Remove event
Run log event strings
Event name
Actions
Email None
Save Signals to PC Save Results to PC
Flash Screen and Beep Flash Screen and Beep
My Report Create report
CANbus abort values Pause Test
CANbus high abort Pause Test
CANbus low abort Pause Test
CANbus alarm values None
CANbus high alarm None
CANbus low alarm None
Monitor Channel Lost Flash Screen and Beep
Limit Channel Lost Pause Test
External Power Lost Flash Screen and Beep
Control Signal Lost Pause Test
Control Channel Overloaded Flash Screen and Beep
Output Reaches Maximum Pause Test
Sensor Overload Flash Screen and Beep
Channel Overload Flash Screen and Beep
User Pressed Stop Flash Screen and Beep
Actions for selected event
Name: Email
Add action
Edit action...
Remove action
Load from library
Save to library
Config. library
OK
Cancel

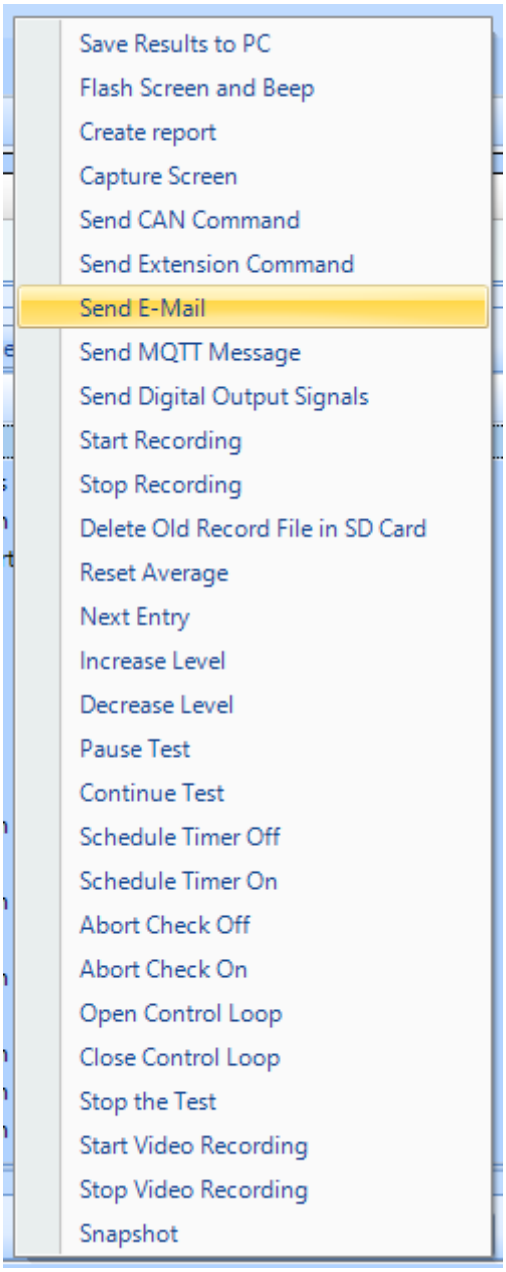


Choose **Send E-mail**
A new Customize Email Content will pop up.
Input mail address and change the subject and body to fit your needs.

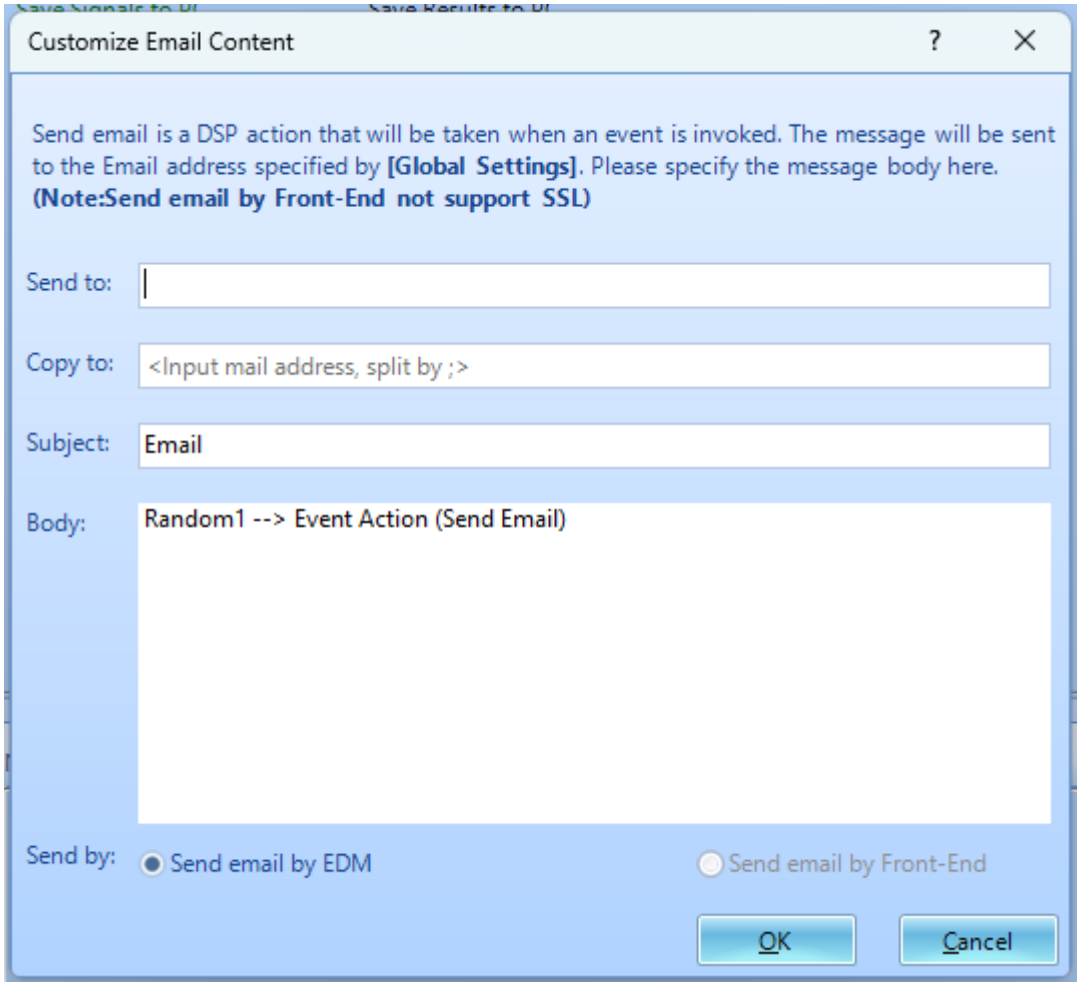

Sending Emails

To use the event action that was just created, click **Run schedule** on the left. The event action created should be under **User defined events**. Click the the event action created to insert into the schedule.

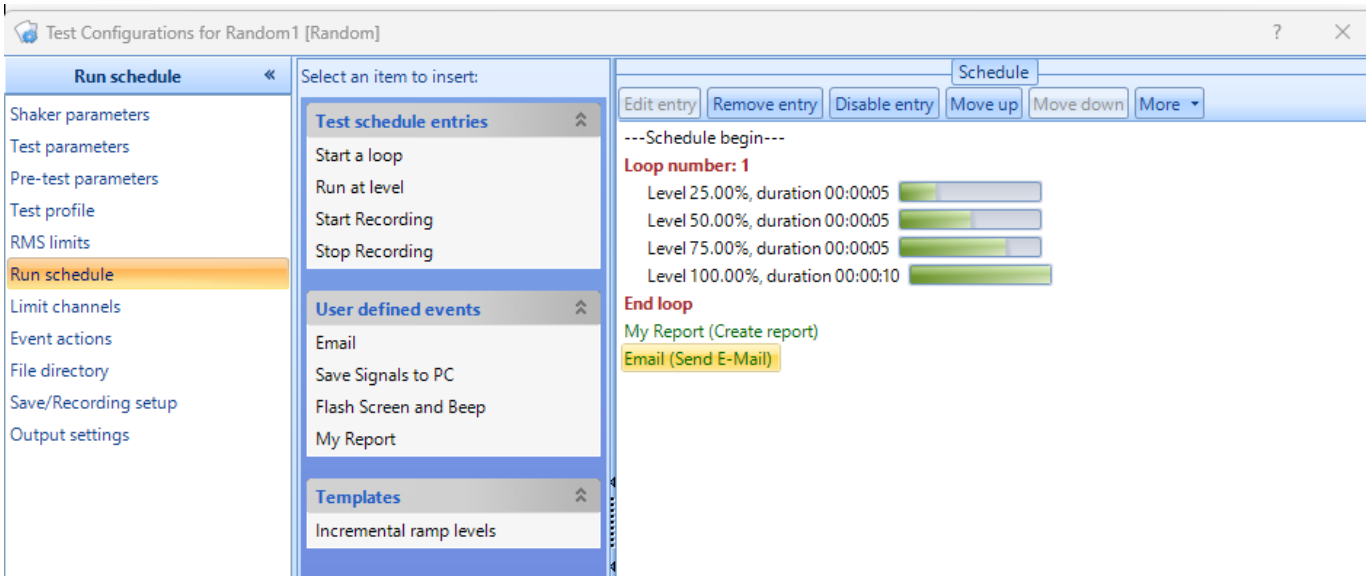

From:
https://help.go-ci.com/ - **Crystal Instruments Help**

Permanent link:
https://help.go-ci.com/vcs:email-alerts?rev=1716577922

Last update: **2024/05/24 19:12**