

# Setting up alert Emails from VCS


## For Outlook

### Setup


To start, we need to change the mail settings.

Mail Setting defines how EDM sends email per Event Action Rules. SMTP server address, port number, encryption type, and authentication parameters are specified as required. The Spider hardware (only version 7.x) is also equipped with a send email function that can be used when the email server doesn't require SSL encryption. Sending email through the hardware is not always available when SSL encryption is required. This feature enables sending emails in Black Box mode. The origin of email, either from the Spider hardware or the EDM, can be chosen from the Event Action Rules. Some email accounts have different SMTP server addresses that EDM must use in order to send emails. These SMTP Servers can be found in the primary email account settings, such as for Outlook in the POP and IMAP setting or searching for the keyword "SMTP"

We can use the shortcut Ctrl-G or under Tools, click Global Settings.

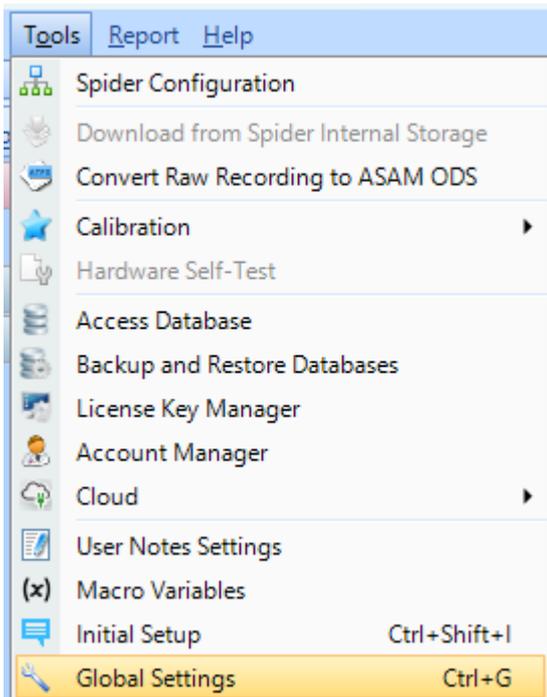


Once the window is up, on the left side, click Mail settings.

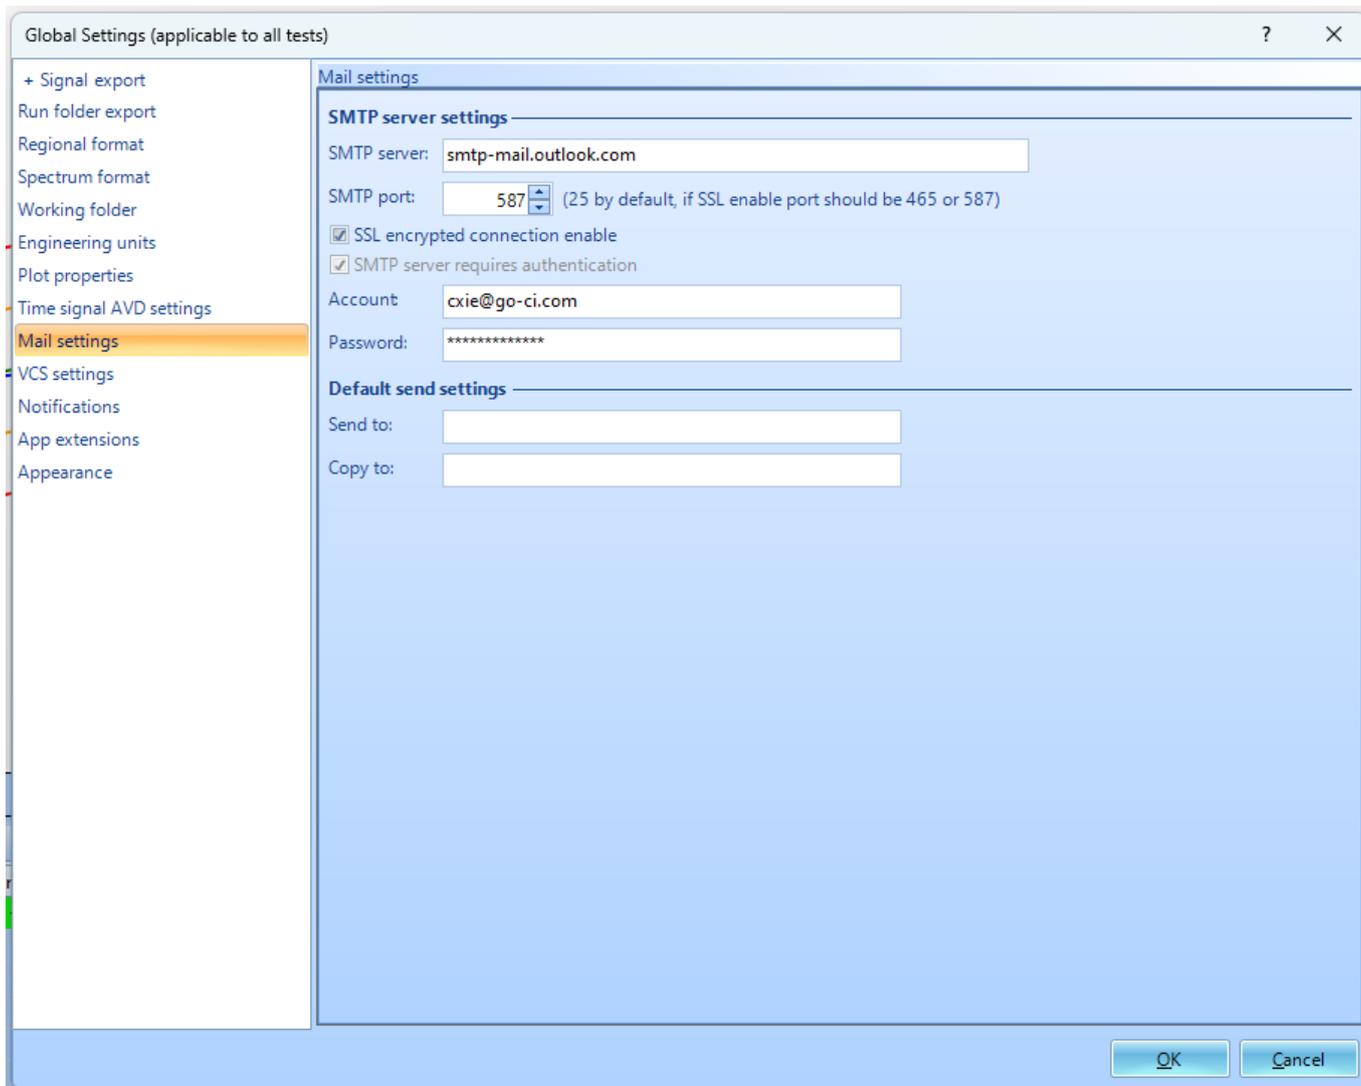


For Outlook, the SMTP server should be: **smtp-mail.outlook.com**  
Change the SMTP port to the number that fits your needs.

Enter the outlook account and the password that you want the mail sent to.


### Creating the Event actions

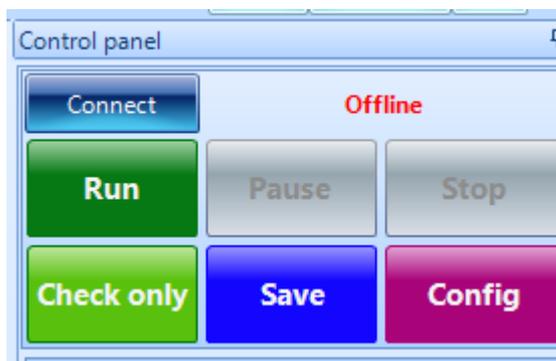

In the control panel on the left, click **Config**.  
Click **Event actions** on the left menu.

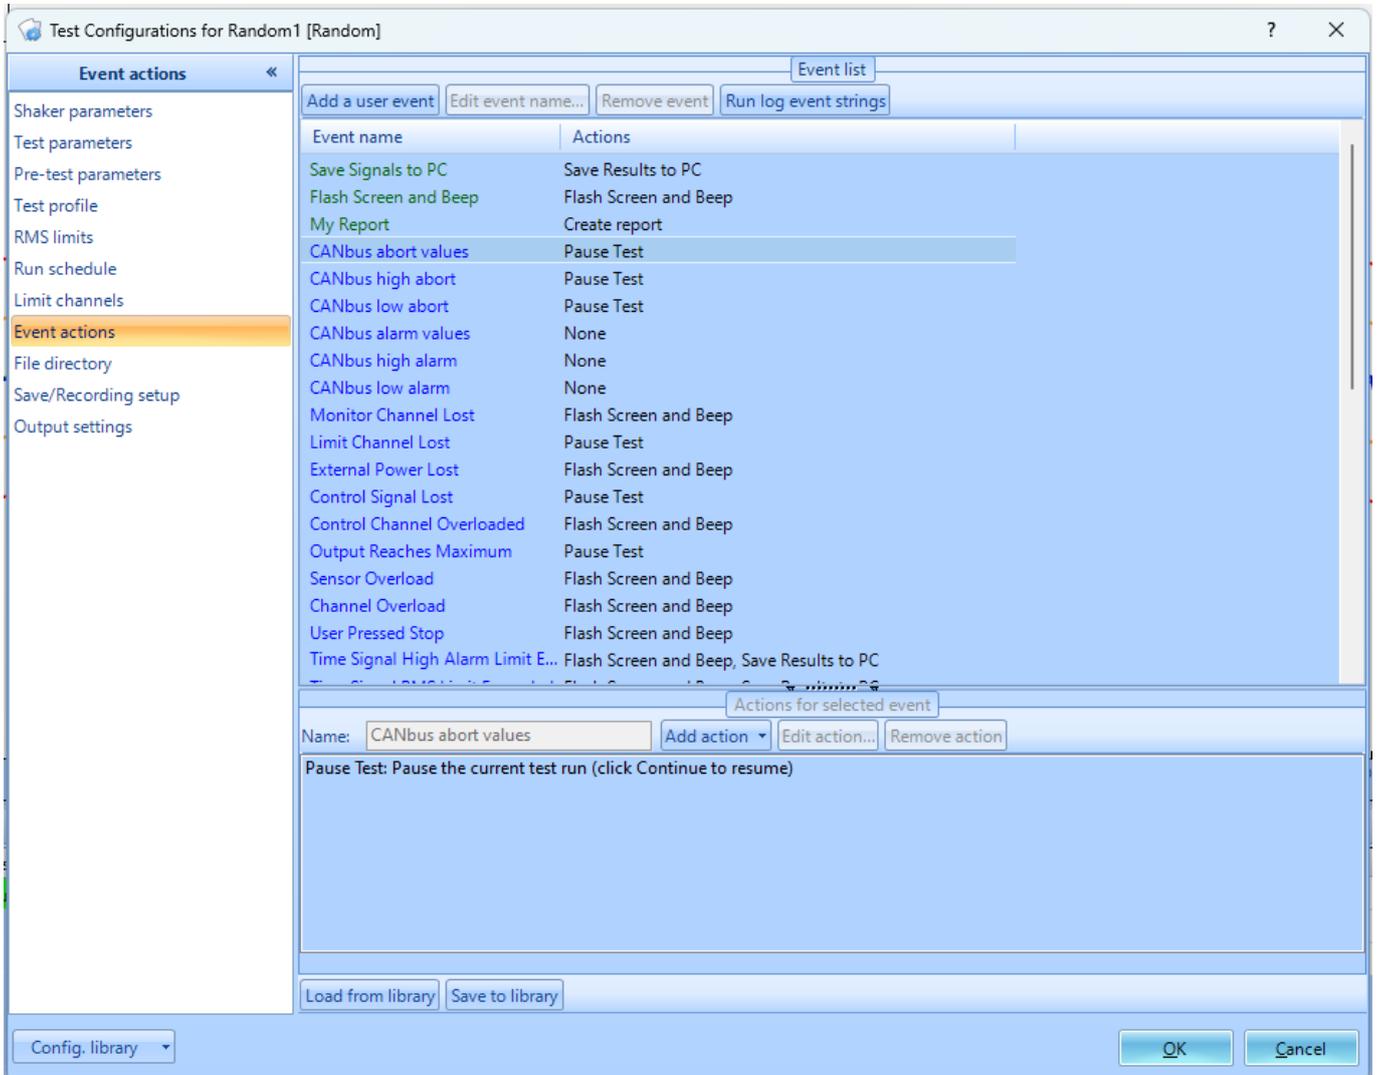

Click Add a user event under the event list. Change the Event name to your liking.

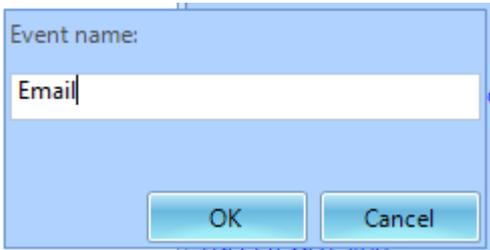

Click **Add action**.

Test Configurations for Random1 [Random]

Event actions

Shaker parameters  
Test parameters  
Pre-test parameters  
Test profile  
RMS limits  
Run schedule  
Limit channels  
Event actions  
File directory  
Save/Recording setup  
Output settings

Event list

Add a user event Edit event name... Remove event Run log event strings

Event name	Actions
Email	None
Save Signals to PC	Save Results to PC
Flash Screen and Beep	Flash Screen and Beep
My Report	Create report
CANbus abort values	Pause Test
CANbus high abort	Pause Test
CANbus low abort	Pause Test
CANbus alarm values	None
CANbus high alarm	None
CANbus low alarm	None
Monitor Channel Lost	Flash Screen and Beep
Limit Channel Lost	Pause Test
External Power Lost	Flash Screen and Beep
Control Signal Lost	Pause Test
Control Channel Overloaded	Flash Screen and Beep
Output Reaches Maximum	Pause Test
Sensor Overload	Flash Screen and Beep
Channel Overload	Flash Screen and Beep
User Pressed Stop	Flash Screen and Beep


Actions for selected event

Name: Email Add action Edit action... Remove action

Load from library Save to library

Config. library


OK Cancel

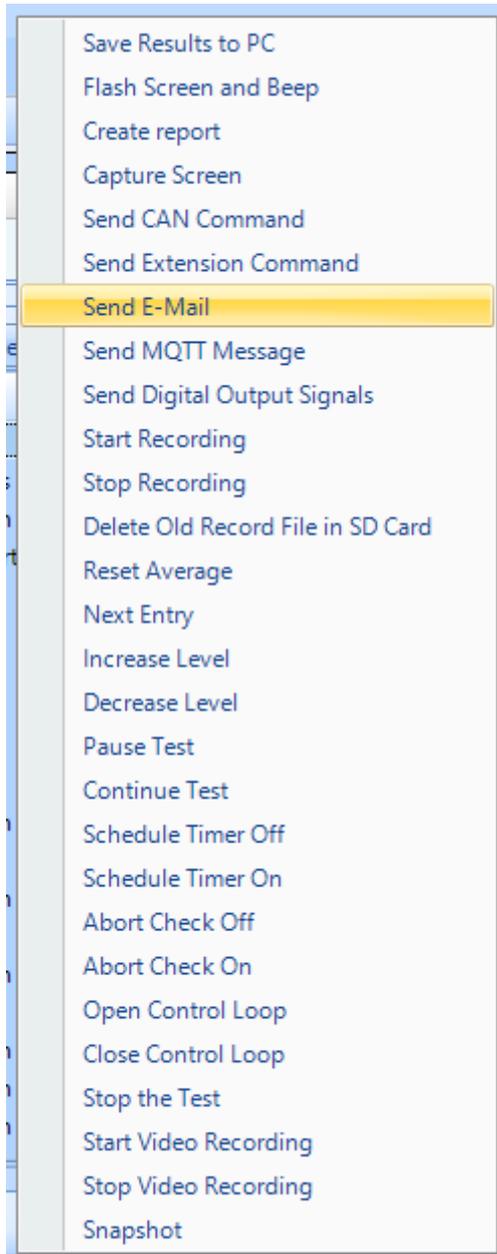

Choose **Send E-mail**


A new Customize Email Content will pop up.

Input mail address and change the subject and body to fit your needs.

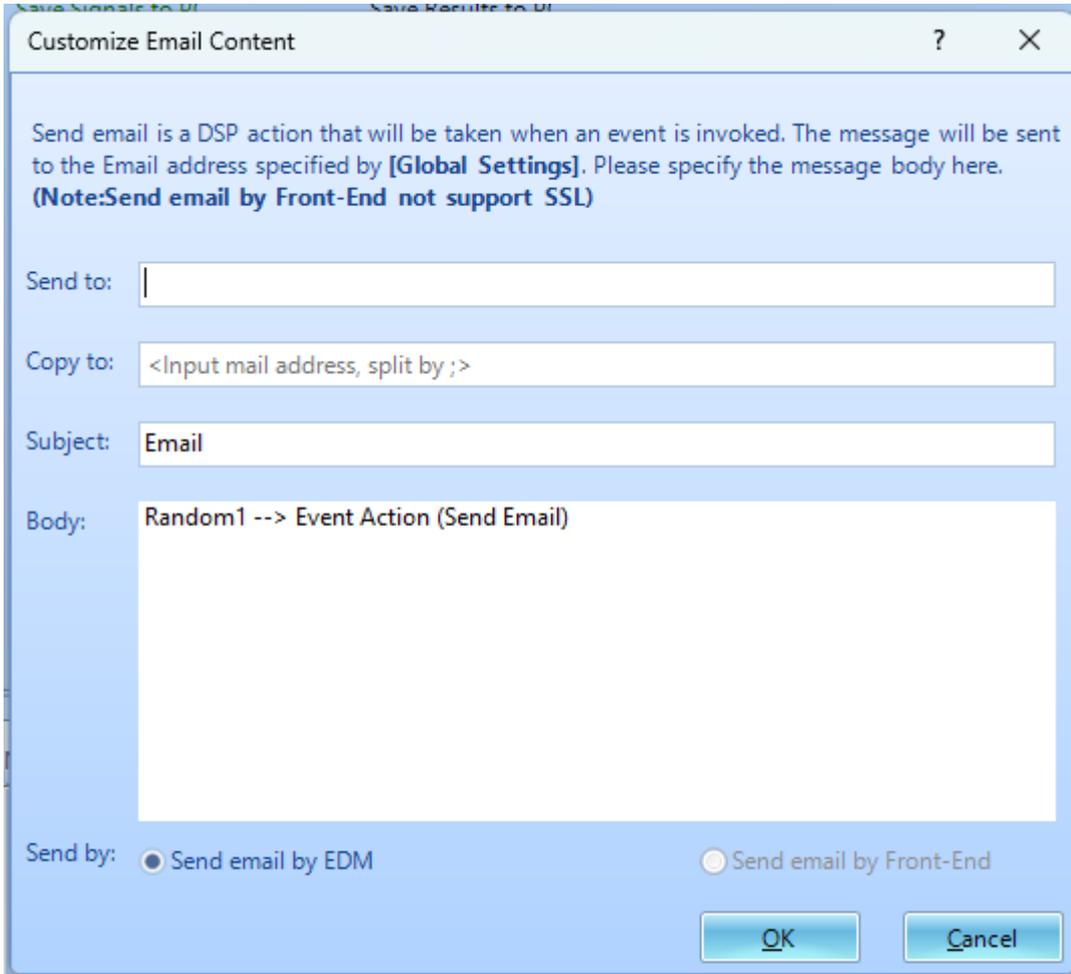

### Sending Emails

To use the event action that was just created, click **Run schedule** on the left. The event action created should be under **User defined events**. Click the the event action created to insert into the schedule.

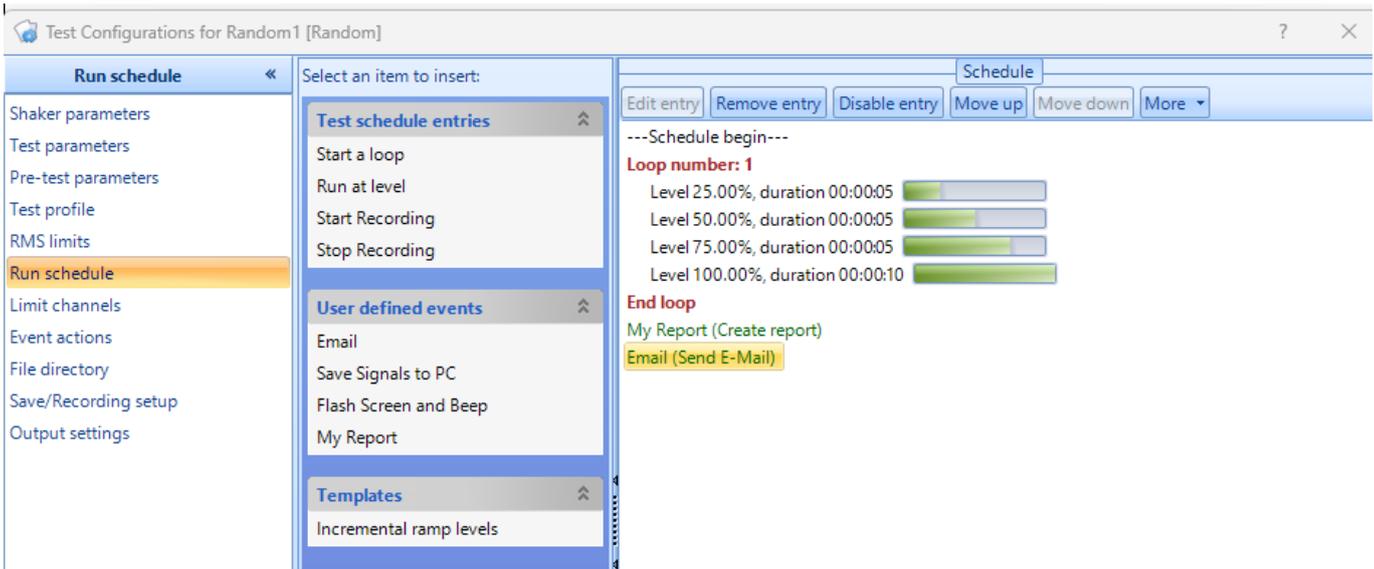

From:  
<https://help.go-ci.com/> - **Crystal Instruments Help**

Permanent link:  
<https://help.go-ci.com/vcs:email-alerts?rev=1716577942>

Last update: **2024/05/24 19:12**