


# CoCo Local Update VDS

The following procedure is applicable to all CoCo device types: CoCo-80, CoCo-70X, CoCo-80X, and CoCo-90X.

**Note:** Manually updates are only recommended when no internet connection is available. Updating the CoCo in this manner will delete all CSA files that are stored on the CoCo and replace them with the factory default CSAs. Please backup any CSA files you want saved. It will have no effect on signal data stored on the SD card.

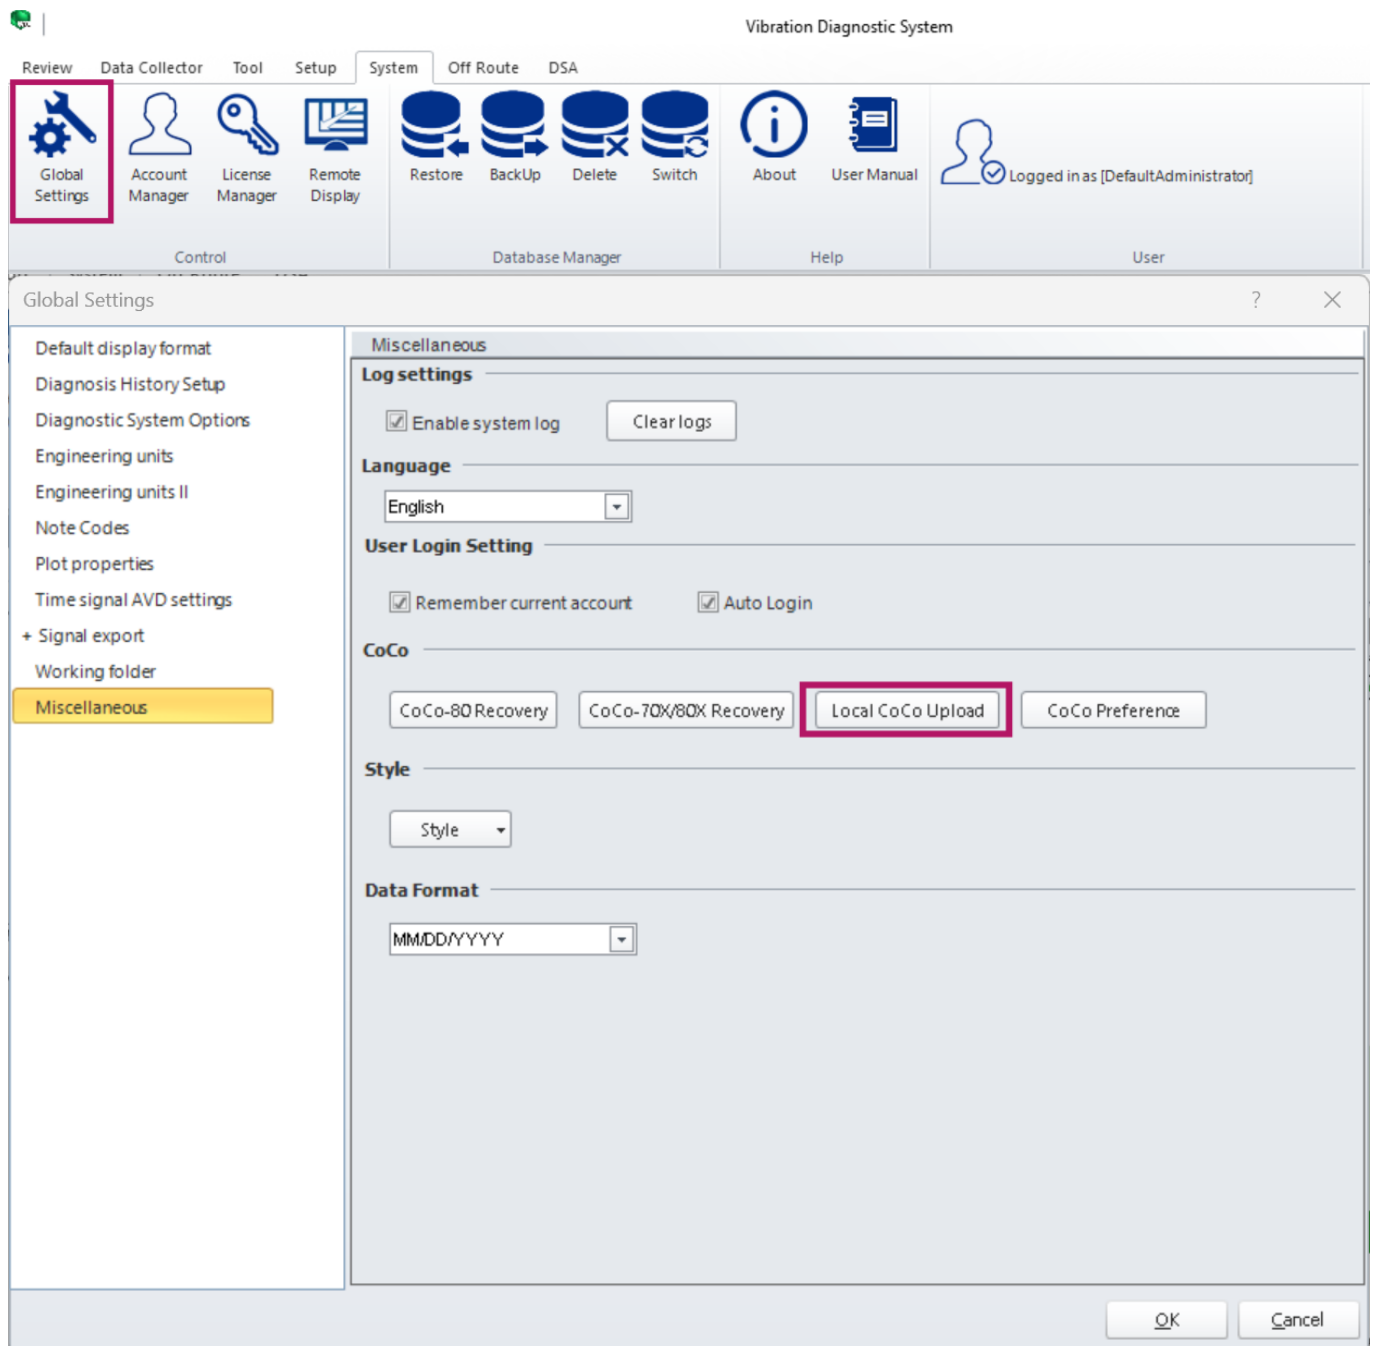

1. Navigate to System → Global Settings → Miscellaneous → Local CoCo Upload
2. The dialog box will open, select **Browse** to locate the xxx.bin file that was sent to you.
3. Enter the update license number and hit the **Update** button. This update license number was also sent to you.

### Update CoCo Software

CoCo device detected by VDS:

4196864 - [Ethernet]

▼

Refresh device List

Locate the update package with browse button

C:\Users\ReidGarcelon\Downloads\CoCo80X\_4196864\_2026072:

Browse

Copy the license key into following box and click update button

6D794C1B373FD55FB67CEDDFA0FA6FC45D8F55140AB75D3E

▲

▼

Update message

▲

▼

Current progress:

Update

Total progress:

Close

During the update, a message will pop up on the CoCo asking *Retain the old CSA File?*

Press “Yes” (or “keep” on recent versions) to keep all CSA settings the same, or press “No” (or “Reset” on newer versions) to reset all CSA settings to the default configuration. It will have no effect on saved signal data.

Once the update process is finished, press **Close**. Finally restart the CoCo-80.

To verify that the correct software version was installed, press **Setup > F2 (About)**. To check the software options, press **Setup > F2 (About) > F1 (Software Options)**.

From:

<https://help.go-ci.com/> - **Crystal Instruments Help**

Permanent link:

<https://help.go-ci.com/vds:coco-update?rev=1784837067>

Last update: **2026/07/23 20:04**